



Special 3-component clear epoxy gel for enclosing the TopStone or TopWall surface structure.

13.04.2018 Version 1

## Advantages:

- High water resistance
- Enclosing the TopStone surface on horizontal and vertical surfaces
- Fast curing
- Low consumption
- The surface is permanently resistant to salt and other chemicals after curing
- Simple enclosure for slope layers
- High abrasion resistance, high UV stability and clarity

## Possible applications:

- Horizontal and vertical surfaces
- Use mainly indoors
- Areas with a permanent water load (bathrooms, showers...)

## Application mixing ratio:

- 1.65:1:0.14 (A:B:C), by weight, 1.5 kg packing 0.89:0.54:0.08 kg by weight

## Packaging and coverage:

Retail packaging	1.5 kg	1.2 m <sup>2</sup>
Retail packaging	30 kg	37.5 m <sup>2</sup>

## Consumption:

- 1.25 to 2 kg/m<sup>2</sup> according to the fraction size and surface flatness
- The estimated consumption for the fraction size 2-4 mm a 3-5 mm is 1.25 kg/m<sup>2</sup>.
- The estimated consumption for the fraction size 4-7 mm a 4-8 mm is 1.5 kg/m<sup>2</sup>.

## Storage:


At temperatures > +5°C < +28°C, in a dry place in the original packaging. For warranty period see details on the packaging. The product may not freeze!!!

## Specifications:

Pot life: 20 minutes + 10 minutes technological break.

## Safety:

Chemical composition - a mixture of epoxy resin with a specially formulated curing system. Transportation classifications - ADR col. A9 and col. C3. More information can be found on the safety data sheet. Fire extinguishing methods - dry sand, alcohol-resistive foam, CO<sub>2</sub>, water mist. DO NOT USE WATER!!!

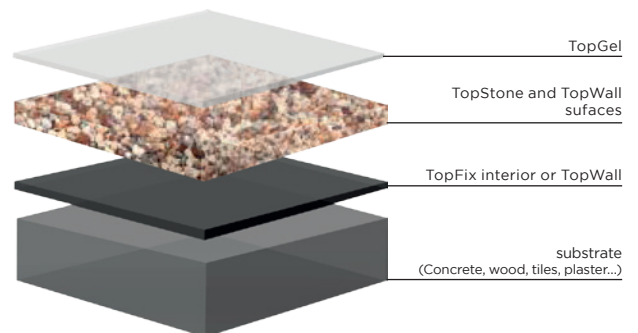

## Application:

1. Pour component B into component A and mix thoroughly for about 1 minute.
2. Add C component, mix thoroughly.
3. Leave 10 minutes - technological break - the gel is being created.
4. Do not mix again!!! - apply immediately, maximum pot life is 20 minutes.
5. Apply with a squeegee or grout trowel.



**WARNING!** Apply to the surface immediately after mixing and technological pause. Failure to do so will result in the risk that, during any remixing, a sharp exothermic reaction will spontaneously occur!



## Products of TopStone wall system:

**TopCleaner**  
TopCleaner Tool  
cleaning solvent

Retail pkg. 1 kg  
Wholesale pkg. 5 kg



**Trowel**  
Grout trowel suitable for the TopStone  
surface structure enclosure application  
with TopGel product



The information contained in this document was assembled based on our best experience and knowledge. When using our products according to our recommended procedures on the materials for which these products are intended, there can be no harm or damage caused. The material, application techniques, and working and operating conditions are, however, outside our control and therefore our recommendations are only generally valid and cannot be used as the basis for liability.

### MANUFACTURER

**TOPSTONE s.r.o.**  
Družstevní 442, 753 01 Hranice  
Tschechische Republik  
+420 580 582 580 | info@topstone.cz  
[www.topstone.cz](http://www.topstone.cz)

ISO 9001, ISO 14001

### EXCLUSIVE IMPORTER AND DISTRIBUTOR

**Slovakia TOPSTONE Slovensko, s. r. o.**  
Address traffic  
Vrbovská cesta 123  
921 01 Piešťany  
+421 918 459 563 | info@topstone-sk.sk  
[www.topstone-sk.sk](http://www.topstone-sk.sk)

### PARTNER / SELLER: